



DW-40L568J

-40°C Biomedical Freezer

Scope of Application

Blood banks, hospitals, disease control centers, research institutes, electronics, chemicals and other industries. For the cryopreservation of plasma, biologics and other products and for cold tests for components and materials.

Innovative Design

- ◉ Energy Saving Hydrocarbon Technology
- ◉ Large Capacity with Excellent Uniformity
- ◉ Low Noise
- ◉ Environmentally-friendly

Qingdao Haier Biomedical Co.,Ltd.

No.280 Feng Yuan Road, High-tech Zone,
Qingdao, 266109, P.R. China
Tel: +86-0532-88935593
E-mail: inquiry@haierbiomedical.com
Website: www.haiermedical.com



Haier Biomedical
International



Haier Biomedical
International



@haiermedicalint



Haier Biomedical
International



Haier Biomedical
International

Product Advantages



Energy Saving Hydrocarbon Technology

The hydrocarbon refrigerants, high-efficiency compressors and optimized refrigeration system delivery energy-efficiencies with a power consumption as low as 4kWh/24h.



Environmentally Friendly

Green and Clean. Hydrocarbon refrigerants are natural refrigerants with a low GWP significantly reducing the impact on the environment. LBA foamed polyurethane is an environmentally friendly insulation material which meets European ROHS directives.



Large Capacity with Excellent Uniformity

Built-in evaporator ensures large internal storage space with a temperature uniformity $\pm 4^{\circ}\text{C}$ and adjustable shelves.



Low Noise

Optimized hydrocarbon system and structural noise reduction design. Noise output is as low as 44 dB.

Product Features

Durable and Quality Manufacture: The electric zinc plate of the interior is powder sprayed, with rounded corners. The exterior is sprayed steel plate, which is anticorrosive, durable and easy to clean.



- Microprocessor**
 - Microprocessor electronic temperature controller, LCD digital temperature display, display precision 0.1°C, the temperature in the freezer is adjustable from -20°C to -40°C.
 - Multiple alarm functions such as high temperature alarm, low temperature alarm, sensor error, power failure alarm, door ajar and high ambient temperature alarm.
 - Multiple alarm methods: sound buzzer alarm, digital flashing alarm, symbol flashing alarm, it can be connected to remote alarm.
 - Alarm battery back-up ensures the freezer continues to alarm for more than 24 hours in the event of a mains power failure.
- Thermally-efficient, Fast Cool/Recovery Rates**

70mm super thick insulation layer design, double door seals and 2 inner doors provide improved thermal insulation and reduced energy consumption.


The pull down rate from ambient is 260 minutes (from 25°C to -40°C at the center point of cabinet).
- Porthole**

There are two access ports on the back of the freezer, which is convenient for users to test independently.
- Security Lock**

It is equipped with mechanical door lock which can be padlocked for additional security.
- Multiple Interface Options**

Standard configuration: Remote alarm interface
Optional configuration: Temperature recorder, RS485 or USB.

Product Dimensions

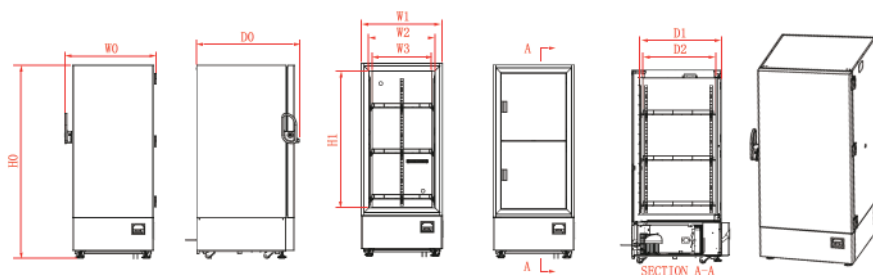

Key

W0=TOTAL WIDTH
W1=FREEZER WIDTH
W2=INNER CABINET WIDTH
W3=INNER CABINET SHELF WIDTH
D0=TOTAL DEPTH
D1=INNER CABINET DEPTH
D2=INNER CABINET SHELF DEPTH
H0=TOTAL HEIGHT
H1=INNER CABINET HEIGHT

CODE MODEL	W0	W1	W2	W3	D0	D1	D2	H0	H1
DW-40L568J	848mm	750mm	610mm	553mm	951mm	755mm	670mm	1780mm	1260mm

Specifications

DW-40L568J									
Technical Data	Cabinet Type		Upright		Dimensions	Exterior Dimension (W*D*H)		mm	848*951*1780
	Climate Class		SN N					in	33.4*37.4*70.1
	Cooling Type		Direct cooling			Packing Dimension (W*D*H)		mm	900*1035*1910
								in	35.4*40.7*75.2
	Defrost Mode		Manual			Container Load (20'/40'/40'H)		12/26/26	
	Refrigerant		HC		High/Low Temperature		Y		
	Sound Level (dB (A))		44		Alarms	Remote Alarm		Y	
Performance	Cooling Performance (°C)		-40			Power Failure		Y	
	Temperature Range (°C)		-20~-40			Sensor Error		Y	
Control	Controller		Microprocessor			High Ambient Temperature		Y	
	Display		LCD			Door Ajar		Y	
Electrical Data	Power Supply (V/Hz)		220~240/50			Accessories	Caster		Y
	Power (W)		340		Foot		Y		
	Electrical Current (A)		2.8		Porthole		Y		
Dimensions	Capacity (L/Cu.Ft)		568/20.1		Inner Doors		2		
	Net/Gross Weight (approx)	kg	190/215		USB Interface		Optional		
		lbs	418.9/474		Temperature Recorder		Optional		
	Interior Dimension (W*D*H)	mm	610*755*1260		16 plastic ABS drawers		Optional		
		in	24*29.7*49.6		3 stainless steel shelves		Optional		
Optional Plastic ABS Drawer	Exterior Dimension (W*D*H)		mm	135*685.5*150		Exterior Dimension (W*D*H)		mm	135*685.5*150
	Interior Dimension (W*D*H)		mm	125*671*100		Interior Dimension (W*D*H)		mm	125*671*100
	Quantity		16		Quantity		3		
	Other		Certification		CE				

*Haier Biomedical reserves the right to change products and specifications without prior notice.