

Under-Counter Pharmacy Refrigerator



HYC-118

Scope of Application :

Versatile, quiet, under-counter pharmacy refrigerator features safety lock, digital display with multiple alarms. Widely used for storage of biological products, vaccines, drugs and reagents in within pharmacy, pharma manufacture, clinical, public health and other life science laboratories.

Innovative Design

- ◉ LED Display
- ◉ Ergonomic Design
- ◉ Multiple Alarms
- ◉ Lockable Design

Qingdao Haier Biomedical Co.,Ltd.

No.280 Feng Yuan Road, High-tech Zone,
Qingdao, 266109, P.R. China
Tel: +86-0532-88935593
E-mail: inquiry@haierbiomedical.com
Website: www.haiermedical.com



Haier Biomedical
International



Haier Biomedical
International



@haiermedicalint



Haier Biomedical
International



Haier Biomedical
International

Product Advantages



Superior Cabinet Temperature Uniformity, Auto Defrost

There are 9 test points within the interior which ensure superior temperature uniformity



Multiple Alarm

Capable of alerting failures due to high and low temperature, sensor error, power failure, low battery, door ajar and remote alarm



Energy Efficient Hydrocarbon (HC) Refrigeration System

Optimised refrigeration system, utilising high-efficiency HC compressor significantly reduces energy consumption



LED Display

Microprocessor control, digital display and temperature adjustment with an increment of 0.1°C



Ergonomic Design

810mm cabinet height makes it easy to place under test bench, saving storage space



Greener by Design


HC refrigerants are natural non-toxic and more environmentally friendly



Lockable Design

Safety lock to prevent unauthorized access


Product Introduction

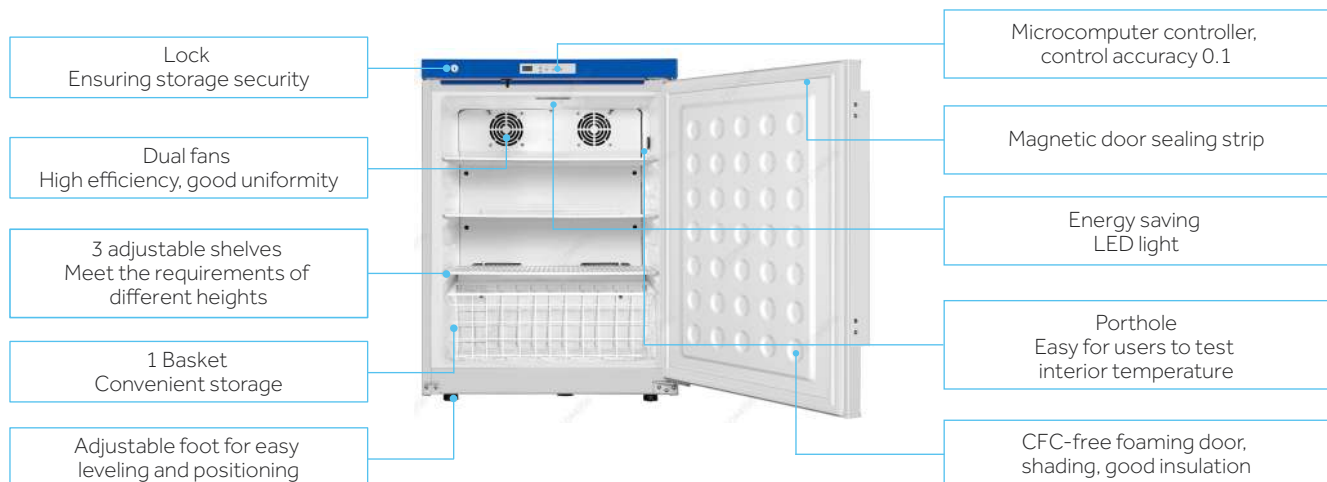


Temperature Curve



Cooling Down Curve

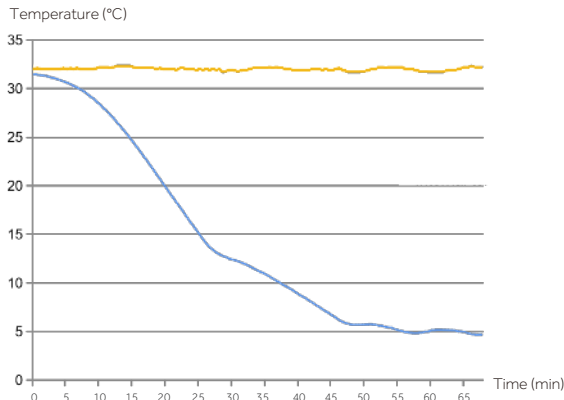

Stability Curve

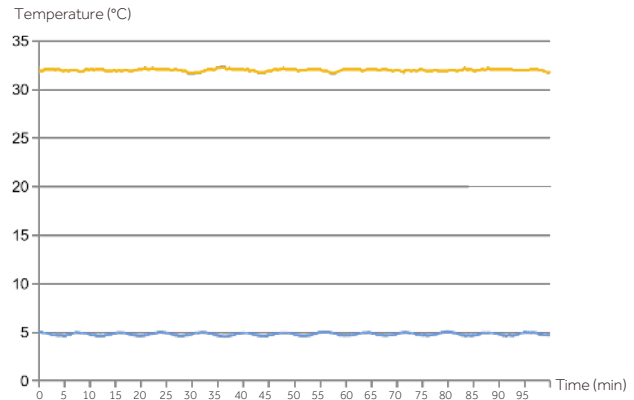

— Internal Temperature
— Ambient Temperature

Specifications



Model			HYC-118	
Technical Data	Cabinet Type		Upright, solid door	
	Climate Class		N	
	Cooling Type		Forced air cooling	
	Defrost Mode		Auto	
	Refrigerant		HC	HC
	Sound Level (dB(A))		41	
Performance	Temperature Range (°C)		2~8	
Control	Controller		Microprocessor	
	Display		LED	
Electrical Data	Power Supply (V/Hz)		220~240/50/60	115/60
	Power (W)		190	190
	Electrical Current (A)		1.4	1.4
Dimensions	Capacity (L/Cu.Ft)		118/4.2	
	Net/Gross Weight (approx)	(kg)	41/46	
		(lbs)	90.5/101.5	
	Interior Dimensions (W*D*H)	(mm)	515*415*630	
		(in)	20.3*16.3*24.8	
	Exterior Dimensions (W*D*H)	(mm)	597*635*810	
		(in)	23.5*25.0*31.9	
	Packing Dimensions (W*D*H)	(mm)	680*690*910	
		(in)	26.8*27.2*35.8	
Alarms	Container load (20'/40'/40'H)		48/96/96	
	High/Low Temperature		Y	
	Remote Alarm		Y	
	Power Failure		Y	
	Sensor Error		Y	
	Low Battery		Y	
	Door Ajar		Y	
Accessories	Caster		Y	
	Foot		Y	
	Porthole		Y	
	Shelves/Drawers		3/1	
Certifications	CE		Y	/
	UL		/	Y

*Haier Biomedical reserves the right to change products and specifications without prior notice.